


## **MP - 2 - 30° ( 12.9 )**


**Plough bolts with conical head 30° with nuts DIN 934 ( 10.9 )**  
)

### **THE MOST PARTICULAR USE**

The bolts to machinery of VOGEL&NOOT

The most often used bolt 12 x 40



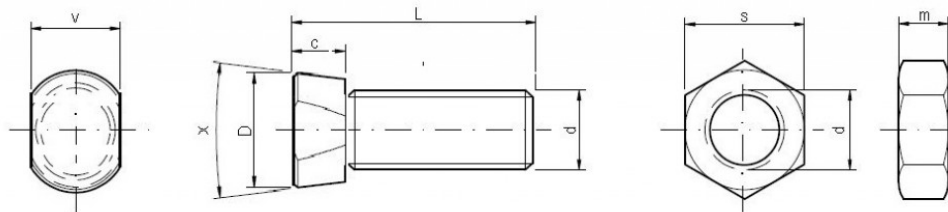

## Specifications

d	c	D	x	v	s	m
M 12	9,00	17,50	30°	13,30	19,00	10,00
M 14	9,00	18,50	30°	14,20	22,00	11,00

The bolts MP - 2 30° do fit to machinery of OEM VOGEL&NOOT, AMAZONE and many others

## Packaging

Packed in boxes / pcs		Packaging without nuts	Packaging with nuts
12 x 30	MP - 2 30° 12.9	150	100/100
12 x 33	MP - 2 30° 12.9	150	100/100
12 x 34	MP - 2 30° 12.9	150	100/100
12 x 35	MP - 2 30° 12.9	150	100/100
12 x 37	MP - 2 30° 12.9	100	50/50
12 x 38	MP - 2 30° 12.9	100	50/50
12 x 40	MP - 2 30° 12.9	100	50/50
12 x 42	MP - 2 30° 12.9	100	50/50
12 x 45	MP - 2 30° 12.9	100	50/50
12 x 50	MP - 2 30° 12.9	100	50/50
12 x 55	MP - 2 30° 12.9	50	50/50
12 x 60	MP - 2 30° 12.9	50	50/50
12 x 70	MP - 2 30° 12.9	50	50/50
12 x 80	MP - 2 30° 12.9	50	50/50
12 x 90	MP - 2 30° 12.9	50	50/50
12 x 100	MP - 2 30° 12.9	50	50/50
14 x 34	MP - 2 30° 12.9	100	50/50
14 x 39	MP - 2 30° 12.9	100	50/50
14 x 40	MP - 2 30° 12.9	50	50/50
14 x 45	MP - 2 30° 12.9	50	50/50
14 x 50	MP - 2 30° 12.9	50	50/50
14 x 60	MP - 2 30° 12.9	50	50/50